


Display Backlight On/Off

Power On/Off, Dimming

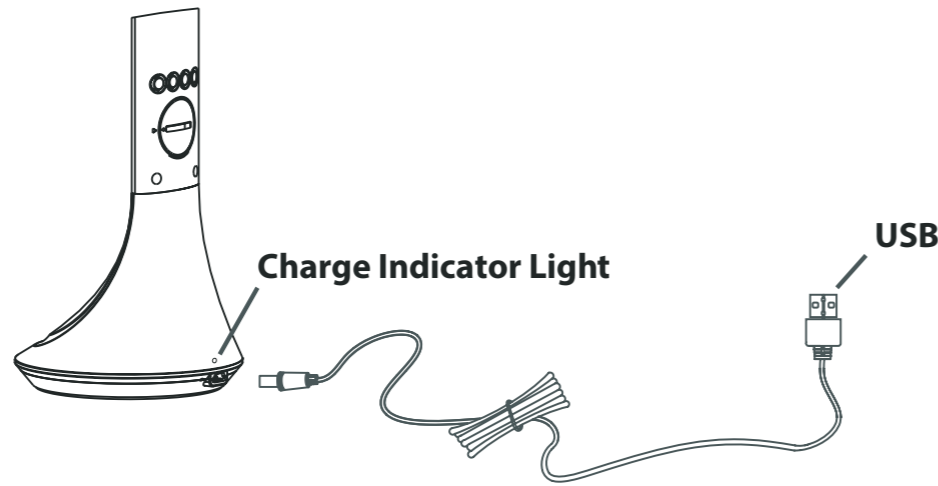

Charge Indicator Light


USB

Li-ion Battery - Capacity: 2200mAh.
Output Voltage: 3.7V

NOTICE:

Never disassemble by yourself. Use the authorized charger only. Exposure of battery to open flames could cause explosion. Do not expose the battery pack out of the temperature range 32°F to 113°F (0°C~45°C)

MADE IN CHINA



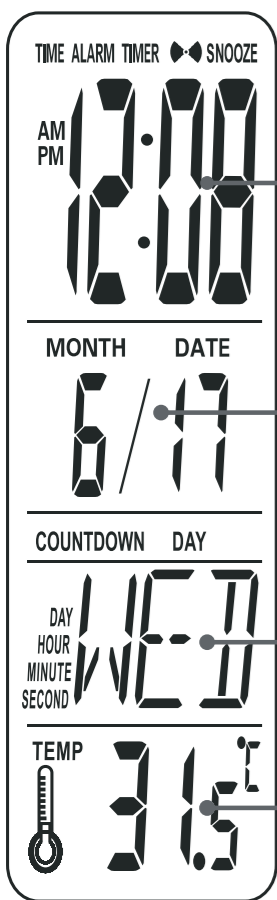


time/alarm

calendar

week

temperature

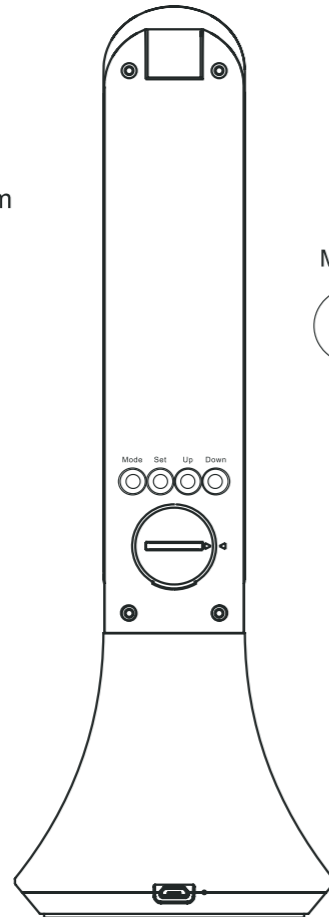

battery cover

CAUTION!

Battery Safety: This product contains a button battery. If swallowed, it could cause severe injury or death in just 2 hours. Seek medical attention immediately.



Q20A

ENGLISH

CONGRATULATIONS!

You've purchased the finest in natural lighting technology with your new OttLite® product.

PRODUCT REGISTRATION FORM

Please complete the enclosed Product Registration Form and return it today by mail, or register online by going to: OttLite.com/warranty

NOTE: THIS UNIT IS FULLY ASSEMBLED

1. Remove lamp from packaging and place on a flat level surface.
2. To turn on the lamp touch the On/Off symbol, touch again to adjust brightness.
3. Adjust the shade to desired height.
4. The ☼ symbol turns the light for the clock on/off.
5. Press the SET button to switch from °C to °F

PLEASE NOTE: This lamp will function while the USB charging cable is plugged into a power source OR on its own internal battery. When using on battery power and the light starts to dim, this indicates that the internal battery needs to be recharged. The RED charging indicator in the back will turn off when the lamp is fully charged.

The Clock/Calendar has four features:

- Time, date and temperature
- Alarm with Snooze
- Birthday reminder
- Timer

To Set The Time:

- By pressing the MODE button once, the display will flash 24Hr. TIME will show at the top of the screen indicating you are in TIME mode.
- To adjust between a 24 or 12 hour clock press the UP or DOWN button once.
- Pressing the SET button will then allow you to set the time and date. When the number you want to change is flashing you can adjust it by pressing the UP or DOWN key.
- Press the SET button to move to the next item you wish to change.
- When finished press the MODE button four times to return to time and date display.

To Set The Alarm:

- Press the MODE button twice, ALARM will appear at the top of the screen indicating you are in alarm mode.
 - Press SET and the hour will start to flash. Press UP or DOWN to set the hour.
 - Press SET again to select minutes and use the UP or DOWN buttons to adjust the minutes.
 - Press SET again to select the alarm tone, using the UP or DOWN buttons to change tone.
 - When finished, press the MODE button three times to get back to time and date display.
- NOTE: The clock will revert to time mode automatically in one minute if no other buttons are depressed.

To Turn the Snooze Function On/Off:

- Press the UP button to turn on Snooze while in TIME mode.
 - To turn SNOOZE mode OFF, press the UP button twice.
- NOTE: SNOOZE will be displayed to indicate Snooze Function is ON.
NOTE: When Alarm is sounding pressing the DOWN button will activate SNOOZE for 4 minutes.

To Set the Birthday Reminder:

- Press the MODE button three times and then press SET to change the time/date the same way you would adjust the time and date. When active, the lamp will play a birthday tune for 5 minutes.
- When finished, press the MODE button twice to return to time and date display.

To Set the Countdown Timer:

- Press the MODE button four times and TIMER will appear at the top of the screen.
- Press SET and the hour will start to flash, use the UP or DOWN buttons to change the hour.
- Press SET again to select minutes and use the UP or DOWN keys to change the minutes.
- Press SET again to start the countdown timer.
- To stop alarm when countdown is finished, press any button.

NOTE: By pressing the DOWN button the lamp will play music. There are 7 pre-programmed tunes.

Clock Battery Replacement

- This lamp uses a CR2032 3V button cell battery to power the clock.
- To remove/install button cell battery: use a coin to rotate battery cover and remove.
- Once battery cover has been removed, push battery upward to remove battery.

Travel Rechargeable LED Task Lamp

- CR2032 3V button cell battery is to be installed with the "+" or flat side facing upward.
- Once new battery is installed, replace battery cover using coin to tighten.

SAFETY WARNING:

- **CAUTION: DO NOT INGEST BATTERY; CHEMICAL BURN HAZARD!**
- This lamp contains a coin/button cell battery. If the coin/button cell battery is swallowed, it can cause severe internal burns in just two hours and can lead to death.
- Keep new and used batteries away from children.
- If the battery compartment does not close securely, stop using the product and keep it away from children.
- If you think batteries might have been swallowed or placed inside any part of the body, seek immediate medical attention.

NOTE: Coin/button cell batteries are small, single cell devices having a diameter greater than their height.

SAFETY WARNING: TO REDUCE THE RISK OF FIRE, ELECTRIC SHOCK, OR INJURY TO PERSONS

1. Turn lamp off and **WAIT UNTIL LAMP HEAD IS COOL** before handling.
2. The LED panel might get hot after several hours of continuous use **DO NOT** place your hands directly on LED light panel.
3. The lamp head included with this unit cannot be replaced by the consumer.
4. **INDOOR USE ONLY.**

NOTE: The important safety instructions appearing in this instruction sheet are not meant to cover all possible conditions and situations that may occur. It must be understood that common sense, caution, and care must be used with any electrical product.

CAUTION! THE LIGHT SOURCE OF THIS LUMINAIRE IS NOT REPLACEABLE; WHEN THE LIGHT SOURCE REACHES ITS END OF LIFE THE WHOLE LUMINAIRE SHALL BE REPLACED.

CAUTION: Any change or modification to product not expressly recognized by OttLite Technologies voids OttLite's responsibility for proper function of product.

FCC PART 15

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that the interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) this device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

CAN ICES-005 (B)/NMB-005 (B)

Specifications

USB: 5V, 500mA / Input power: 5V, 500mA
Built-in Lithium Battery: 3.7V / 2200mAh (power for LED light)
Power for calendar: Button cell CR2032 / 3V

Accessories:

- USB charging cable

Travel Rechargeable LED Task Lamp

CSRD300W CSRD300W-SHPR